



LUBRICANT

Raising Performance



Product Catalogue

EP-140/API-GL-5



Gear EP-140 Oil is recommended for its use spiral level and final drives requiring a straight mineral lubricant APL services categories GL-5 convenient viscosity behavior under load or temperature regime. Suitable Gear protection at high-low speeds as well as in high-low torque operation.

Pack size :
900ml,1,10,20,55,210 ltr

HEAVY DUTY OIL UTTO



Universal oil for transmission and hydraulic system of tractors equipped with wet brakes. Suitable for all new generation tractors having oil-immersed brakes. Recommended to meet the requirements of Swaraj and Mahindra and Mahindra tractors. Ensures noise-free operation of immersed brakes with its friction modifier technology. Ensures longer transmission life.

Pack size :
800ml,900ml,1,10,20,55,210 ltr

Coolant Radiator



In a heavy-duty diesel engine, only one-third of the total energy produced works to propel the vehicle forward. An additional one-third is removed as heat energy by the exhaust system. The remaining one-third of heat energy produced is taken away by the engine coolant.

Pack size :
900ml,1,10,20,55,210 ltr

ESPORT-20W50/API-SN



20w-50 is a Synthetic blend base material super high-performance engine oil that meets the API SN it combines the latest developments in all formation and additive technology to provide a lubricating oil with the highest level of protection, whilst promoting fuel efficiency and lowering emissions in modern low friction engines.

Pack size :
2.5,3,10,20,55,210 ltr

TRANS FLUID TYPE-F/ATF-TQ



TRANS FLUID is recommended for automatic transmissions and power steering systems of vehicles requiring general motors "TYPE F" quality fluids. • Consistent performance over extended period of use.

- Better load carrying capacity.
- Quicker response time.
- Higher oxidation stability.

Pack size :
2.5,3,3.5,4,4.5,5,10,20,55,210 ltr

STAR-JET 5W30



20w-50 is a Synthetic blend base material super high-performance engine oil that meets the API SN it combines the latest developments in all formation and additive technology to provide a lubricating oil with the highest level of protection, whilst promoting fuel efficiency and lowering emissions in modern low friction engines.

Pack size :
2.5,3,3.5,4,4.5,5,10,20,55,210 ltr

WISE 4T 20W40 API-SN



4T 20W-40 is a high performance conventional four-stroke motorcycle engine oil primarily intended for general use in all types of four-stroke motorcycles and engines.

Pack size :
500ml, 900ml,
1,2.5,3,3.5,4,4.5,5,10,20,55,210 ltr

LONG LIFE GREASE



JM POWER Long Life Grease is premium quality general multi-purpose automotive grease. It has a smooth and buttery texture and is light golden yellow in color. It is manufactured from high viscosity index premium quality base oils, lithium soap thickener and advanced rust, corrosion and oxidation inhibitors to provide high mechanical and chemical stability. Its unique technology of higher dropping point gives exceptional stability under thermal stress.

Pack size :
2.5,3,3.5,4,4.5,5,10,20,55,210 ltr

SAE 15W40 API-SN



15W-40 is a premium fleet engine oil specifically formulated to provide reliable protection for trucks and buses using Compressed Natural Gas (CNG) or Liquefied Natural Gas (LNG). Engine Oil 15W-40 is formulated from high quality base stocks and a balanced additive system. High thermal and oxidation stability helps control sludge build-up and deposits. Reserve TBN neutralizes oxy acids and nitrates to reduce deposits.

Pack size :
500ml,1,3,3.5,4,4.5,5,7.5,
10,15,20,55,210 ltr

REDGEL GREASE



JM POWER Industrial Grease That Provides Cool-running, Long-lasting

- Water-resistant Performance. It Dramatically
- Lengthens Grease Intervals,
- Eliminates Bearing Failures,
- Can Extend Bearing Life By Up To Threefold,
- And Does Not Harden With Age.
- It Is Recommended For Extended Service Applications And Has A High Dropping Point,
- Almagard Is Extremely Tacky And Will Not Wash Off,
- Pound Out Or Melt And Run
- Even In Severe Conditions. It Is Ideal For On-and
- Off-road Equipment Where High Impact Occurs,
- As Well As Many In-plant Applications,
- Grease Protects Against Oxidation, Rust And Corrosion.

Pack size :
500ml,1,3,3.5,4,4.5,5,7.5,
10,15,20,55,210 ltr

EP 80W90/API-GL-5



GEAR X EP-80W90 are multipurpose gear oils containing extreme pressure additives for moderate service conditions. GEAR X EP-80W90 especially for hypoid gears (differential) in axle drives at high speed and/or low speed and high torque conditions.

Pack size :
900ml,1,10,20,55,210 ltr

OXY PLUS 15W40/API-CH4 PLUS



15W-40 is a premium fleet engine oil specifically formulated to provide reliable protection for trucks and buses using Compressed Natural Gas (CNG) or Liquefied Natural Gas (LNG). Mobil Gas Engine Oil 15W-40 is formulated from high quality base stocks and a balanced additive system. High thermal and oxidation stability helps control sludgebuild-up and deposits

Pack size :
800ml,900ml,1,10,20,55,210 ltr

GRENADE 15W40/API-CF-4



In a heavy-duty diesel engine, only one-third of the total energy produced works to propel the vehicle forward. An additional one-third is removed as heat energy by the exhaust system. The remaining one third of heat energy produced is taken away by the engine coolant

Pack size :
900ml,1,10,20,55,210 ltr

ESPORT 4T-20W50/API-SN



20w-50 is a Synthetic blend base material super high-performance engine oil that meets the API SN it combines the latest developments in all formation and additive technology to provide a lubricating oil with the highest level of protection, whilst promoting fuel efficiency and lowering emissions in modern low friction engines.

Pack size :
2.5,3,10,20,55,210 ltr

SAE-20W50/API-SN



4T 20W-40 is a high performance conventional four-stroke motorcycle engine oil primarily intended for general use in all types of four-stroke motorcycles and engines.

Pack size :
2.5,3,3.5,4,4.5,5,10,20,55,210 ltr

HYDRON AW66



Hydraulic AW 68 Series oils are good quality anti-wear hydraulic oils intended for industrial and mobile service applications, subjected to moderate operating conditions and requiring anti-wear lubricants. They are formulated to deliver good performance in a range of hydraulic components used in systems subjected to moderate operating conditions.

Pack size :
2.5,3,3.5,4,4.5,5,10,20,55,210 ltr

SAE-20W40/API-SN/SM/CH-4



LEADER+ grades are red colour multigrade car engine oils made from high quality base stocks and additives. They are available in 20W 40 viscometrics.

Pack size :
2.5,3,3.5,4,4.5,5,10,20,55,210 ltr

TRACTOR OIL 20W40/APU SM/CH-4



TRACTOR Oil Meets The Specifications Of Major Equipment Manufacturers Of Tractors. Enhances The Frictional Properties And Optimizes Clutch Performance And Ensures Noise Free Operation Of Wet Brakes. High Viscosity Index Coupled With High Shear Stability Provides Consistent Performance And Excellent Low Temperature Fluidity.

Pack size :
2.5,3,3.5,4,4.5,5,10,20,55,210 ltr

SAE15W40 API-CI4+/CH4



High performance semi synthetic blend engine oil made especially for vehicles fueled with Ultra Low Sulfur Diesel (ULSD) and require the use of Low Ash engine oils, to protect the installed emissions equipment, including DPFs, catalytic converters, EGR and SCR injection. This oil offers excellent performance to maximize component life, extend drain intervals and improve fuel performance.

Pack size :
500ml,1,3,3.5,4,4.5,5,7.5,
10,15,20,55,210 ltr

PHENOLIC 10W30/API-SN



PHENOLIC 10W30 is high performance multi-grade engine oil suitable for 2 wheelers having 4 stroke petrol engines. Exceeds the most stringent performance requirements of jaso MA2.

Pack size :
500ml,1,3,3.5,4,4.5,5,7.5,
10,15,20,55,210 ltr

OXY PLUS - 15W40/API CI-4 PLUS



15W-40 is a premium fleet engine oil specifically formulated to provide reliable protection for trucks and buses using Compressed Natural Gas (CNG) or Liquefied Natural Gas (LNG). Mobil Gas Engine Oil 15W-40 is formulated from high quality base stocks and a balanced additive system.

Pack size :
7, 7.5, 8.5 LTR


15W40 ROYAL-X



15W-40 is a premium fleet engine oil specifically formulated to provide reliable protection for trucks and buses using Compressed Natural Gas (CNG) or Liquefied Natural Gas (LNG). Engine Oil 15W-40 is formulated from high quality base stocks and a balanced additive system. High thermal and oxidation stability helps control sludge build-up and deposits. Reserve TBN neutralizes oxy acids and nitrates to reduce deposits.

Pack size :
175, 350ml, 10, 20, 55, 210 ltr

REDGEL GREASE

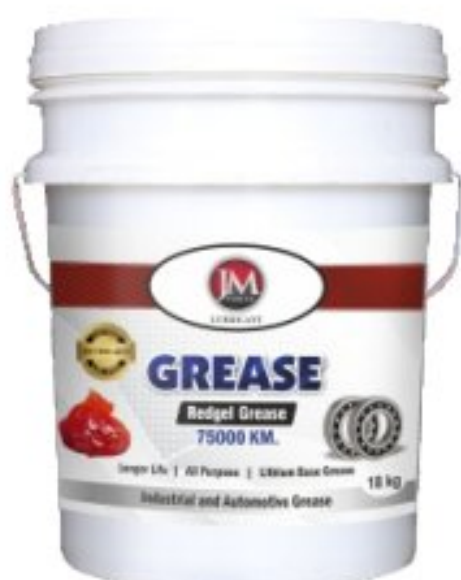

JM POWER Industrial Grease That Provides Cool-running, Long-lasting

- Water-resistant Performance. It Dramatically
- Lengthens Grease Intervals,
- Eliminates Bearing Failures,
- Can Extend Bearing Life By Up To Threefold,
- And Does Not Harden With Age,
- It Is Recommended For Extended Service Applications And Has A High Dropping Point,
- Almagard Is Extremely Tacky And Will Not Wash Off,
- Pound Out Or Melt And Run
- Even In Severe Conditions, It Is Ideal For On-and Off-road Equipment Where High Impact Occurs,
- As Well As Many In-plant Applications.
- Grease Protects Against Oxidation, Rust And Corrosion.

Pack size :
500ml, 1, 5, 10, 20, 55, 210 ltr

BLACK GOLD SAE 20W50



20W-50 is formulated to meet API SF / CD performance requirement. It is blended using high quality base oils, shear stable viscosity improver, performance proven engine oil additives and pour point depressant. It is multigrade engine oil for use all round the year.

Pack size :
500ml, 1, 5, 10, 20, 55, 210 ltr

AP-3 GREASE

Ap3 GREASE is a premium quality all purpose automotive grease. Recommended for all types of Wheel bearings used in automobiles e.g Heavy duty, Light commercial, Passenger vehicles. Excellent thermal and oxidation stability. Resistance to water wash out. Superior protection against rusting & corrosion.

Pack size :- 500gm, 1, 5, 10, 18, 180kg.

EP-2 GREASE

Extreme pressure (EP) greases are multifunctional extreme pressure lithium soap greases manufactured from high viscosity index base oils and fortified with carefully selected extreme pressure additives for high load bearing capacity. They are recommended for gearboxes, heavily loaded anti-friction and plain bearing on industrial and automotive equipment.

Pack size :- 500gm, 1, 5, 10, 18, 180kg.

CHASSIS GREASE

Chassis Grease is a calcium soap grease, having excellent water repellent and good water wash out properties. Recommended for all types of chassis lubrication requirements such as ball joints, suspension, steering gear system, plain bearings, bushings and pins in automotive chassis assemblies.

Pack size :- 500gm, 1, 5, 10, 18, 180kg.

MP-3 GREASE

Mp3 is a premium quality lithium soap base grease and is recommended for variety of greasing applications in automotive, agriculture, construction and industrial application. It is recommended for lubrication of wheel bearing, chassis, nipple steering linkages, universal joints etc. The grease provides maximum protection by adhering well to the lubricated bearing surfaces sealing them from dirt and abrasive contaminants.

Pack size :- 500gm, 1, 5, 10, 18, 180kg.

RED GEL GREASE

Red is a long life lithium Red colour gel grease formulated with a specially designed soap system, high viscosity index base oil and carefully balanced additives for lubrication under moderate to heavy loads and intermittent high temperatures. The soap in the grease helps in retaining its structure even under severe service condition and high loads, thereby extends component life through extension of re-lubrication interval.

Pack size :- 500gm, 1, 5, 10, 18, 180kg.

GEL GREASE

GEL GREASE excellent shear stability, good surface adhesion and antiwear characteristic grease specially formulated from refined, high viscosity index base oils and lithium complex thickener. This grease is fortified with unique additives for long life performance, rust and oxidation inhibitors specially developed for bearing operating under severe heavy shock loads.

Pack size :- 500gm, 1, 5, 10, 18, 180kg.

INDUSTRIAL LUBRICANT

GEAR OIL-150 | GEAR OIL-220 | GEAR OIL-320 | HYDRAULIC-100 | LOOMS OIL

WATER SOLUBLE CUTTING OIL | STATE CUTTING OIL | TRANSMISSION OIL | SPINDLE OIL

THERMIC OIL | CNC LUBRICANT WAY-68 | GRINDING OIL | RPO | CONNING OIL | FURNACE OIL | WARPING OIL



LUBRICANT

JAY MAHESH LUBRICANTS PVT. LTD.

Alankar society, S. No.32-33, PL-30, Karvenagar,
Pune, Pune City, Maharashtra, India, 411052

Web : jmlubricants.com

☎ 78554 00101



FOLLOW US ON :     